


## NON-INSULATED – CAR PARK, BITUMEN SHEET WATERPROOFING

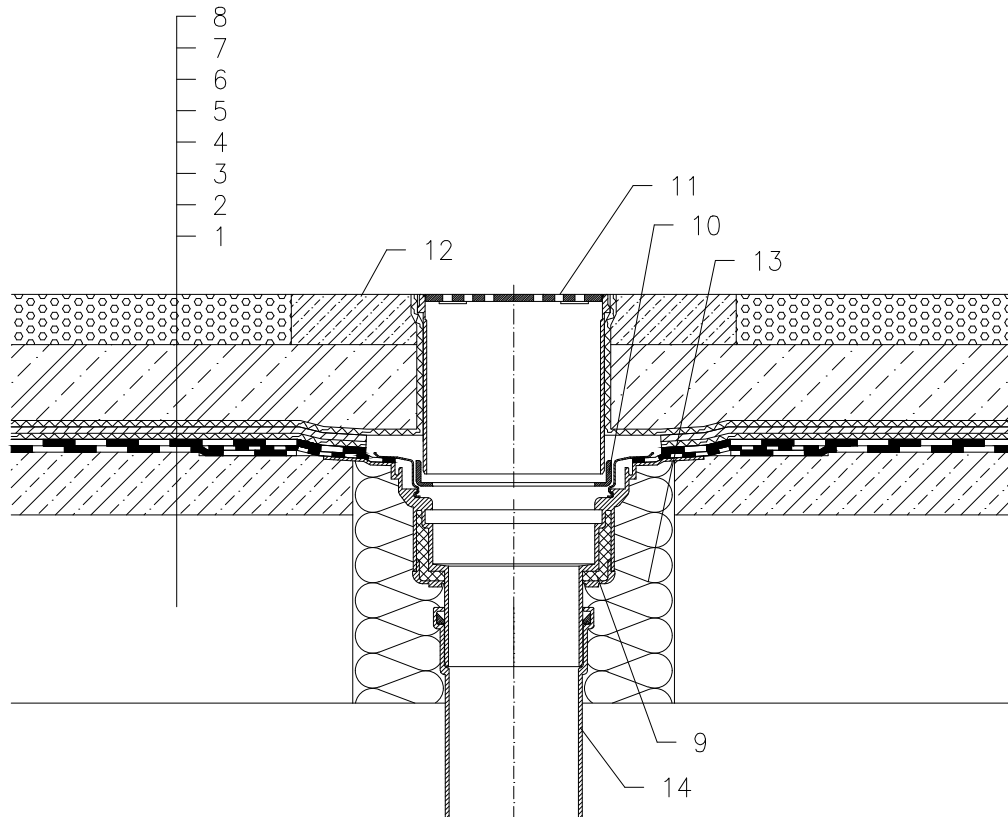

- 1 SUPPORT CONSTRUCTION
- 2 GRAVITY LAYER
- 3 BITUMEN SHEET WATERPROOFING NON-SOLID GLUED OR LAID LOOSE
- 4 DILATATION LAYER
- 5 DRAINAGE LAYER
- 6 FILTER LAYER
- 7 REINFORCED CONCRETE SLAB
- 8 CAST ASPHALT
- 9 FLAT-ROOF DRAIN HL62H WITH INSULATED DRAIN BODY, WITH FACTORY WELDED BITUMEN MEMBRANE  $\varnothing$ 500 mm, THICKNESS 4 mm
- 10 ADAPTER 062B.3E
- 11 GRATING HL66 (TRUNCATABLE) WITH STAINLESS STEEL FRAME AND SECURED STAINLESS STEEL GRATE, MAX. LOAD 1,5 t
- 12 CONCRETE BELT 1000 X 1000 X 100 mm
- 13 ASSEMBLY FOAM
- 14 DOWNPIPE

**NOTE:**

FLAT-ROOF DRAIN HL62.1H HEATED (230V, 10-30 WATTS) CAN BE USED.

ASSEMBLY INLET:  $\varnothing$ 255 MM, ALTERNATIVELY 255X380 MM

112211