


DOUBLE LAYER ROOF – ANCHORED SYSTEM, TIMBER SUPPORTING STRUCTURE
 PLASTIC FOIL WATERPROOFING

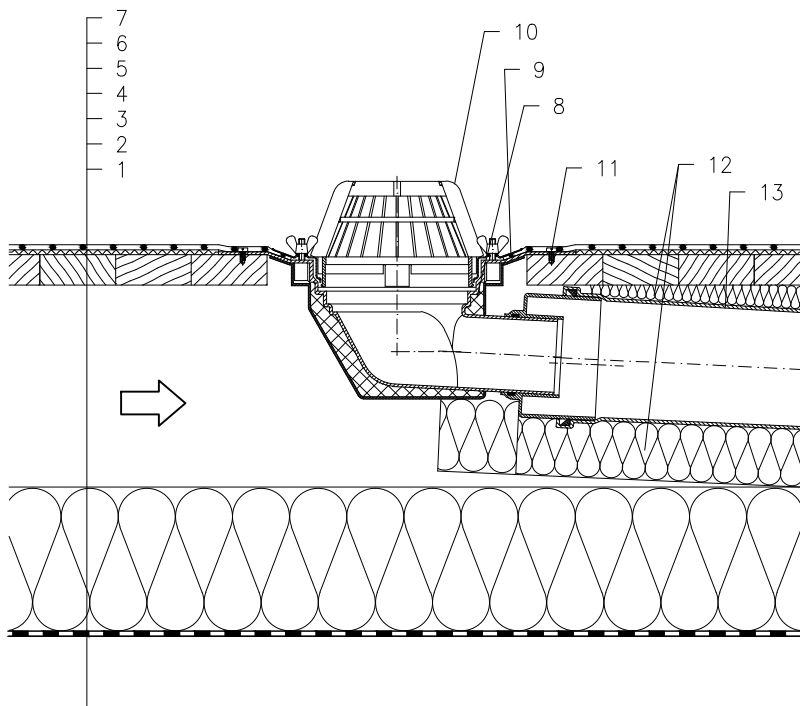

- 1 SUPPORT CONSTRUCTION
- 2 MOISTURE STOP AND TEMPORARY SAFETY WATERPROOFING FROM BITUMEN SHEET OR PLASTIC FOIL
- 3 THERMAL INSULATION
- 4 AIR LAYER
- 5 UPPER CLADDING SUPPORTING STRUCTURE – TIMBER
- 6 DILATATION LAYER
- 7 PLASTIC FOIL WATERPROOFING MECHANICALLY ANCHORED
- 8 FLAT-ROOF DRAIN HL64 WITH INSULATED DRAIN BODY, FLANGE AND STAINLESS STEEL CLAMPING RING (FOR PVC SHEETINGS FLAT –ROOF DRAIN HL64P; FOR FPO SHEETINGS BASED ON PP FLAT –ROOF DRAIN HL64F)
- 9 DICHTMANSCHETTE (SIEHE DETAIL-ZUBEHÖR)
- 10 DOMED PLASTIC GRATE $\varnothing 180$ mm (INCL. WITH HL64)
- 11 ANCHOR BOLT
- 12 DOWNPIPE THERMAL INSULATION
- 13 DOWNPIPE

NOTE:

FLAT-ROOF DRAIN HL64.1(FOR PVC SHEETINGS FLAT –ROOF DRAIN HL64.1P;
 FOR FPO SHEETINGS BASED ON PP FLAT –ROOF DRAIN HL64.1F) HEATED (230V, 10–30 WATTS) CAN BE USED.

ASSEMBLY INLET: 260 x 380 mm

21221