


DOUBLE LAYER ROOF – GLUED SYSTEM, CONCRETE SUPPORTING STRUCTURE  
 PLASTIC FOIL WATERPROOFING

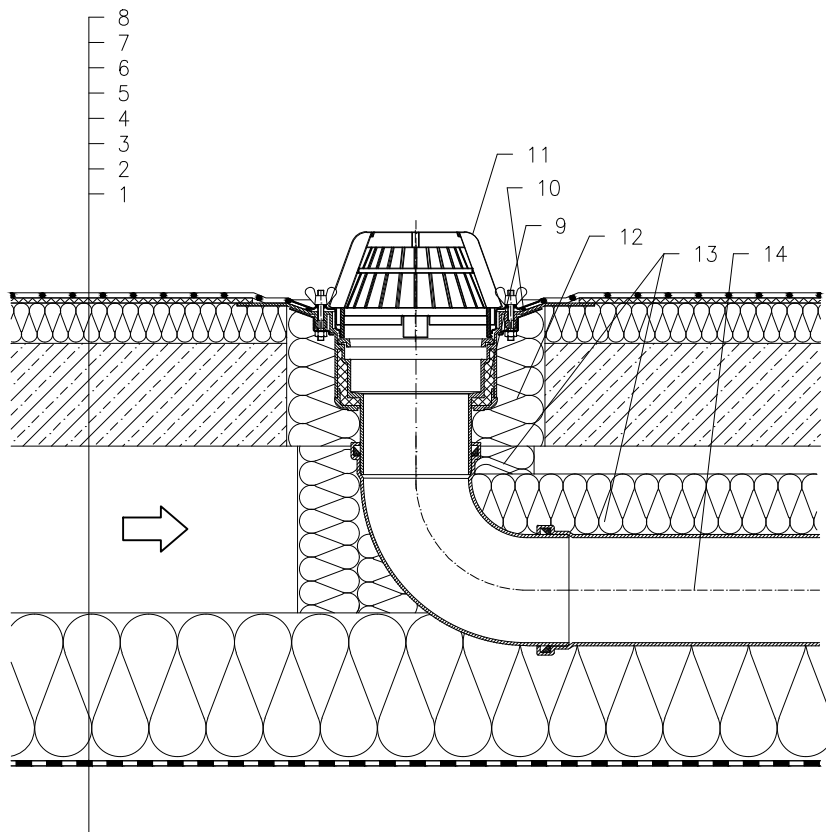

- 1 SUPPORT CONSTRUCTION
- 2 MOISTURE STOP AND TEMPORARY SAFETY WATERPROOFING FROM BITUMEN SHEET OR PLASTIC FOIL
- 3 THERMAL INSULATION
- 4 AIR LAYER
- 5 UPPER CLADDING SUPPORTING STRUCTURE – CONCRETE
- 6 UPPER CLADDING THERMAL INSULATION
- 7 DILATATION LAYER
- 8 PLASTIC FOIL WATERPROOFING NON-SOLID GLUED
- 9 FLAT-ROOF DRAIN HL62 WITH INSULATED DRAIN BODY, FLANGE AND STAINLESS STEEL CLAMPING RING
- 10 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 11 DOMED PLASTIC GRATE  $\varnothing 180$  mm (INCL. WITH HL62)
- 12 ASSEMBLY FOAM
- 13 DOWNPIPE THERMAL INSULATION
- 14 DOWNPIPE

NOTE:

FLAT-ROOF DRAIN HL62.1(FOR PVC SHEETINGS FLAT –ROOF DRAIN HL62.1P;  
 FOR FPO SHEETINGS BASED ON PP FLAT –ROOF DRAIN HL62.1F) HEATED (230V, 10–30 WATTS) CAN BE USED.  
 ASSEMBLY INLET:  $\varnothing 255$  mm, OR 255 x 380 mm